

6086





TriFugal Ink Pump, Electric motor driven Adjustable flow, Full flow bypass & mixing system. Stainless steel end plate, hinged lid, shaft and discharge tube. Delrin impeller housing. Air space adapter reduces ink contamination of motor. Stainless open rod design is easy to clean.

Parts

- 022 Stainless end plate
- 1-16 Gasket
- 025 Vollute
- 089 Handle
- 091 Impeller
- 7013 Stainless shaft
- 075 Stud coupling (2)
- 072 Stainless discharge tube
- 034 Stainless hinged lid
- 003125 Stainless rods (3)
- 03771 Air space adapter
- 073 Bypass
- 101 Ball Valve (2)
- 074 Return tube
- 076 Backnut (2)
- 1029 Hosetail
- 6-2086 Electric Motor



025 Vollute

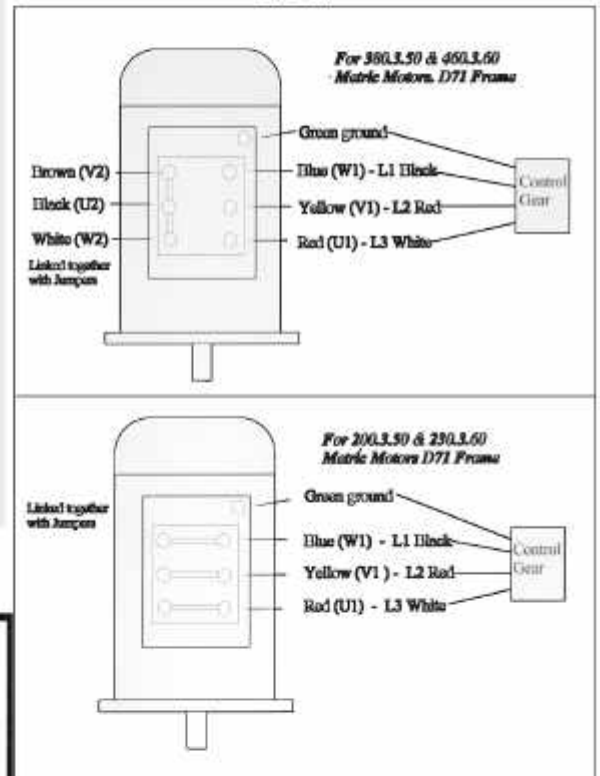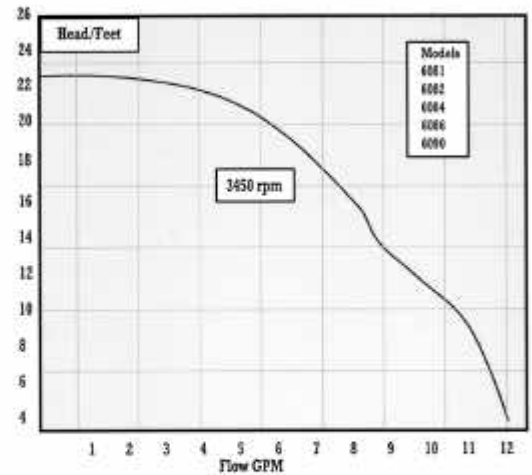

TriFugals can be cut to any length but the following are standard items

Model	Wt. lb/Kg	Ht. In/MM
6081	39/18	23.75/603
6082	39/18	23.75/603
6084	45/20	24.75/628
6086	35/16	22.00/559
6090	47/17	24.75/628

Standard Canadian length is also a stock item. Add 2"/50MM to all lengths.

Rotation ** Important



The motor fan should run CW

Powerwise
Ink Pumps

2700 West 21st Street, Erie, PA 16506 USA
Tel: 814 833 3715 Fax: 814 838 3850
e-mail: sales@powerwise.com
Website www.powerwise.com